

AD01200

## Prime Application

IF/Baseband Signal Sampling



## Board Features

- Dual 12-bit 500Mps ADCs
- External Clock Input

## Summary

The **XRM2-ADC-D7/500** is an XRM2 I/O Module, providing two Analog to Digital converters with 12-bit resolution and sampling rates up to 500Mps

Aimed at IF/Baseband Signal Sampling, the sampling clock can be sourced from either an external clock source or from a clock generated within the attached FPGA board. A Trigger I/O port is provided for use as a trigger control and an Auxiliary I/O port for general purpose signaling. An additional two ports are available for use as high-speed interconnect between boards for synchronisation.

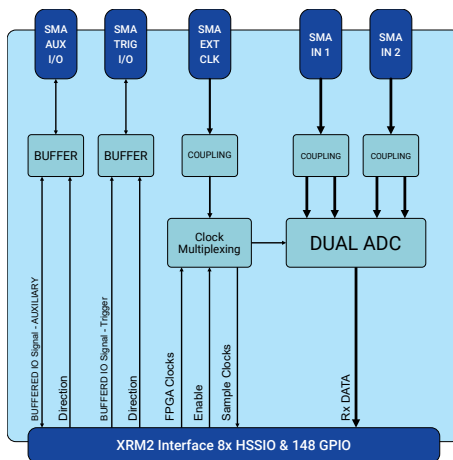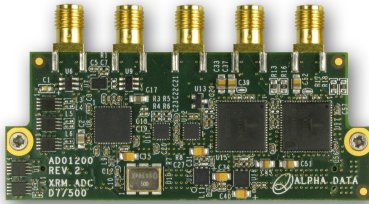

## Deliverables

XRM2-ADC-D7/500 Board  
One Year Warranty  
One Year Technical Support

## Board Format

Alpha Data XRM2 I/O Module

## Input/Output Interfaces

### ADC

Dual Analog to Digital Converters

Resolution: 12-bit

Max Sample Freq: 500Mps

Bandwidth: 4.5 MHz to 700 MHz (3 dB)

Impedance: 50Ω

Connector: SMA

### External clock input

External Clock Input

### Trigger I/O

Trigger I/O

### Auxiliary I/O

Auxiliary I/O

## Environmental Specification

Cooling Option	Operating Temperatures		Storage Temperatures	
	Min	Max	Min	Max
AC0	0°C	+55°C	-40°C	+85°C

## Operating Humidity

Up to 95% (non-condensing)

## EMC Standards

FCC 47CFR Part 2

EN55022:2010 Equipment ClassB

## Ordering Information

**Order Code: XRM2-ADC-D7/500**